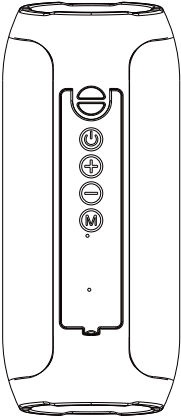
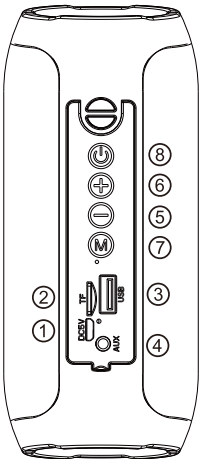
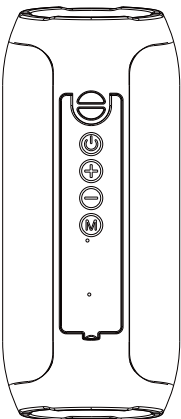
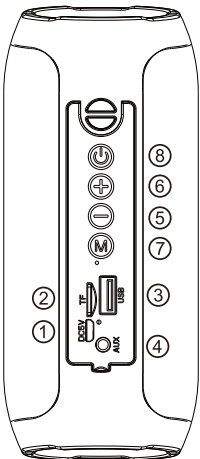


尺寸：50*100mm,5折页正反印刷，材料：70g双胶

TG117 使用说明书  蓝牙音箱	基本参数 ●无线规格：V5.3 支持L2CAP/A2DP/AVRCP，用来接收立体声音频信号，通过协议可以控制音频发射端的上下曲操作； 支持HSP/HFP(Handsfree profile)，具有免提功能，可以进行语音通讯 ●无线传输范围：10M ●音频性噪比：≥90db ●电池容量：约1200mAh ●内置电压：3.7V ●正常音量播放：约3-4H ●喇叭规格：φ45mm *2 ●喇叭功率：5W *2 ●频率响应：120HZ-20KHZ ●尺寸：68.8*68.8*160mm ●单机重量：约419g ●充电电压：5V/500mA ●充电时长：约3-4H 功能特点 1、采用先进的无线音频解码芯片，支持无线设备连接； 2、支持FM收音，可直接搜索收听	区域的电台； 3、音色柔和清晰有动感，各层次分明； 4、直读TF卡和U盘； 5、无线接收距离远可长达10米 6、支持LINE IN音频输入，为你提供电脑音箱功能。可直接连接手机/平板电脑/及电视无线配对播放音乐； 7、无无线连接的状态下，半个小时自动关机。 8、支持TWS. 功能指示 ①DC 5V充电接口，(Micro USB V8 充电接口) ②TF卡输入接口：TF卡插入时可解码MP3格式的音频播放 ③U盘输入接口：U盘插入时可解码MP3格式的音频播放 ④LINE IN输入接口：3.5音频头外音输入 ⑤在音乐的模式下，短按为“上一曲” 长按为“音量减” ⑥在音乐的模式下，短按为“下一	 曲” 长按为“音量加” ⑦音乐模式下（TF卡、LINE IN、U盘、无线、FM），短按为功能模式切换；两台音箱同时在开机无线状态且都没有连接手机，长按其中一台音箱的M键2-3S听到提示音且其中一台按键灯没有闪烁即连TWS成功，再连接手机即可。	⑧电源开关：长按时为开机状态，再长按时为关机状态音乐的模式下（TF卡、LINE IN、U盘、无线），短按为播放/暂停” 在FM模式下短按为自动搜索电台、在搜台过程中短按一下为取消往后自动搜索电台，在无线模式并配对手机情况下，有电话接入时短按一下为免提接听，再短按一下为挂断电话，双击为重拨电话； 备注：在收音模式下，请插入音频线增加收音信号强度，收音效果会更好；U盘和TF卡用（FAT32方式格式化）
---	---	---	---	--

TG117 User Manual  SPEAKER	PRODUCT SPECIFICATIONS: ●Wireless: V5.3 Support: L2CAP/A2DP(AVCTP/AVDTP/AVRCP), to receive stereo audio signal, can control the audio transmitter and up and down operation through the agreement; support HSP / HFP (Handsfree profile), with hands-free function, Can communicate with people. ●Working distance:10M ●SNR:≥90db ●Battery: about 1200mAh ●Built-in voltage: 3.7V ●Normal volume playing time: about 3-4H ●Speaker driver: φ45mm*2 ●Power: 5W *2 ●Frequency response:120Hz-20KHz ●Unit size:68.8*68.8*160mm ●Unit weight: about 419g (not includ accessories) ●Charging:5V/500mA ●Charging time: about 3-4h PRODUCT FEATURE: 1.International advanced wireless chip and circuit design techniques,	support wireless devices. 2.With FM function, can search radio station broadcast automatically 3.With Hi-Fi speaker, to make sure the clear and bright sound. 4.Support Micro SD card and USB card, play MP3 format audio. 5.The wireless working distance is 10 meters. 6.With AUX line in, can directly connect the outside devices, for example, tablet PC/TV/cell phones. 7.It will close automatically if disconnect Wireless for 30 mins 8.Support TWS. KEY AND SLOT FUNCTION: 1.DC 5V slot, (standard Micro USB V8 charging cable for power charging) 2.TF slot: It can decode and play MP3 format audio when put TF card into the slot. 3.USB slot: It can decode and play MP3 format audio when put the USB card into the slot. 4.LINE IN slot: Use the Mini 3.5 head input through outside devices. 5.When play music, Press short for	 last song, long press to turn down the volume. 6.When play music, press short for next song, long press to turn up the volume. 7.When play music,(USB card/TF card/Wireless/line in/FM), short press to swith model. Keep the TWS speaker under Wireless mode without pairing with	mobile ,press the “M” key for 3 seconds either of the speaker until hear a hint”du du du” for TWS mode ,then can paire the mobile. 8.Press long for power on /power off. When play music,(USB card/TF card/Wireless), short press for “play/pause”. In FM mode, press short to search station automatically, press again to stop searching. Under wireless mode with mobile paired, when call coming,press short to answer a call hands-free,press again to hand up,press twice to ring up a call. NOTE: In the FM mode, put in micro charging cable to get better FM radio station. USB DISK/ TF CARD should be format FAT32
---	--	---	--	--